





HANSA**DESIGNO** STYLE

Installation and maintenance guide








5101 2283

I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +80°C

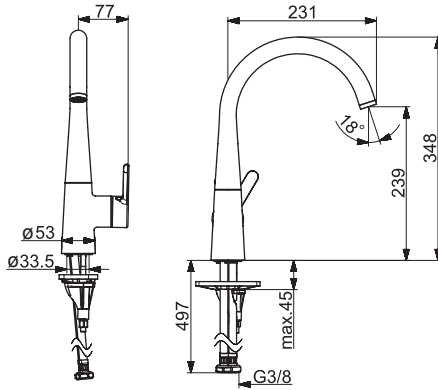


mpi.hansa.com/51012283

5138 2283

I (ISO 3822)
 EN 817, EN 15091
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +70°C

IP 55
 AA 1.5 V Lithium x 2

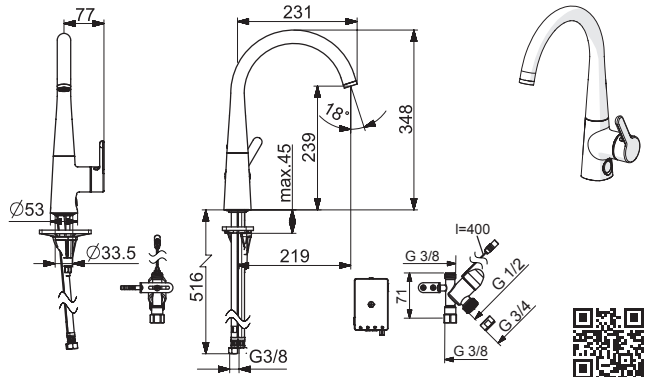


mpi.hansa.com/51382283

CE (EMC 2014/30/EU)

5136 2283

I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +80°C

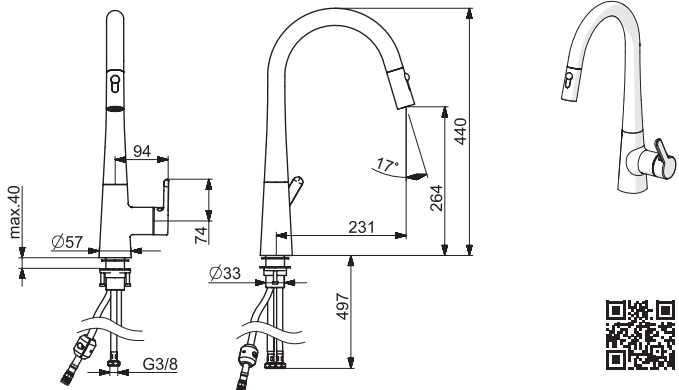


mpi.hansa.com/51362283



5137 2283

I (ISO 3822)
 EN 817, EN 15091
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +70°C

IP 55
 AA 1.5 V Lithium x 2

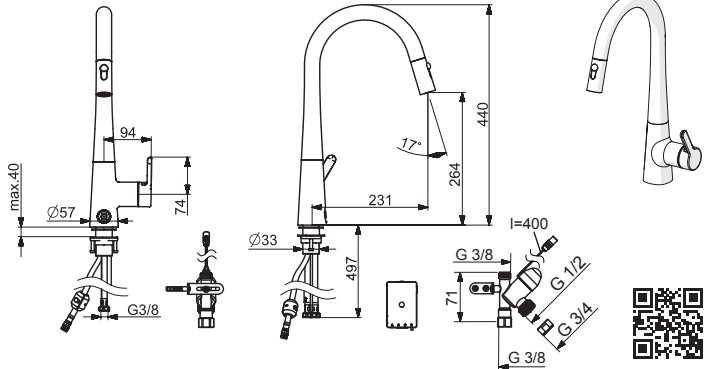


mpi.hansa.com/51372283

CE (EMC 2014/30/EU)

5102 1183


EN 817
 50 - 500 kPa
 0.1 l/s (300 kPa)
 300 kPa (0.1 l/s)
 max. +90°C

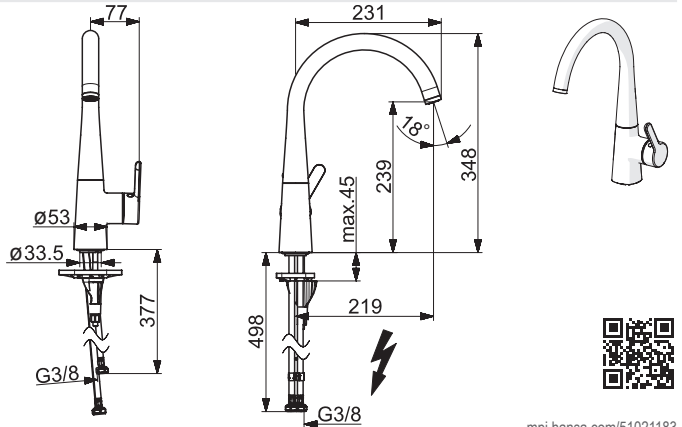





mpi.hansa.com/51021183

5101 2283 0037


I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.20 l/s (300 kPa)
 300 kPa (0.2 l/s)
 max. +90°C

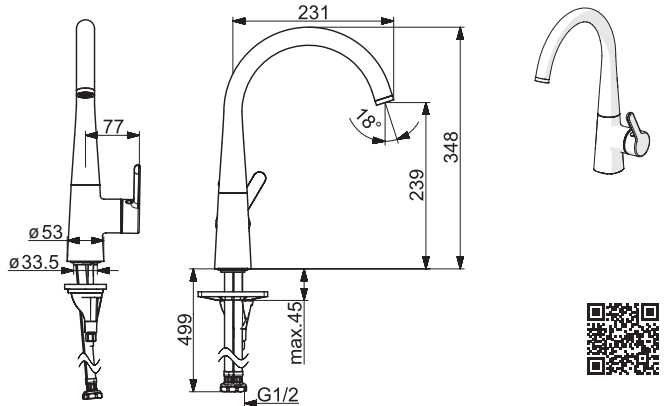


mpi.hansa.com/510122830037





1

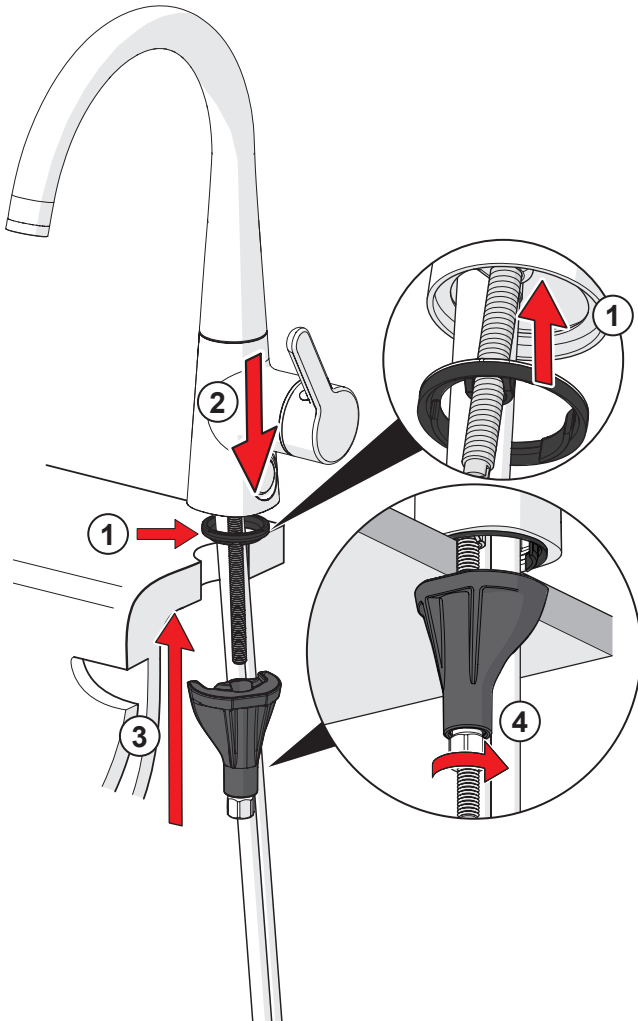

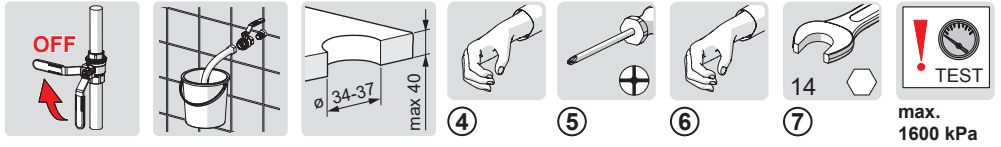

1




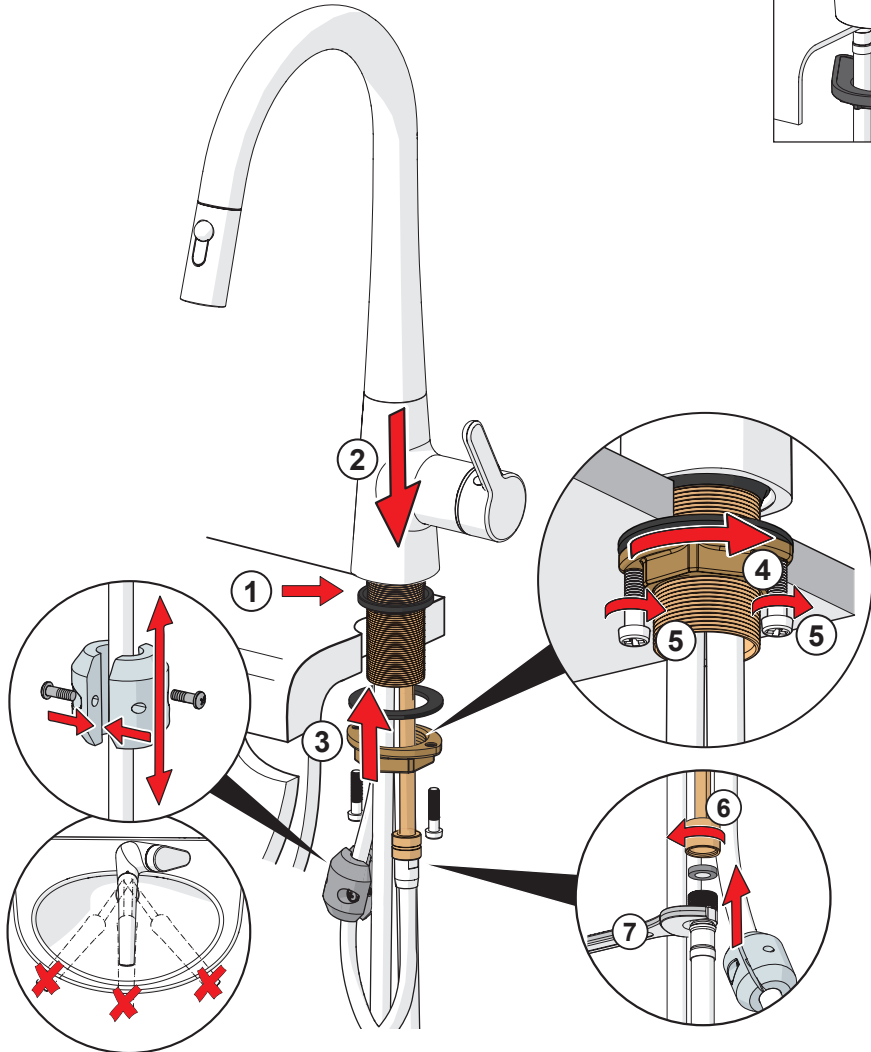






19






①


2

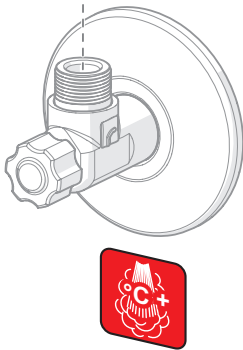

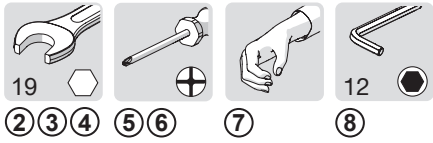

2

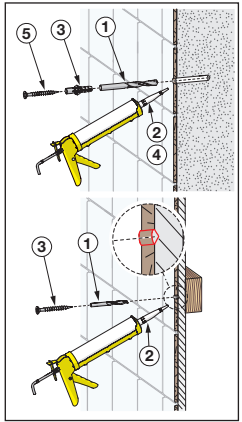
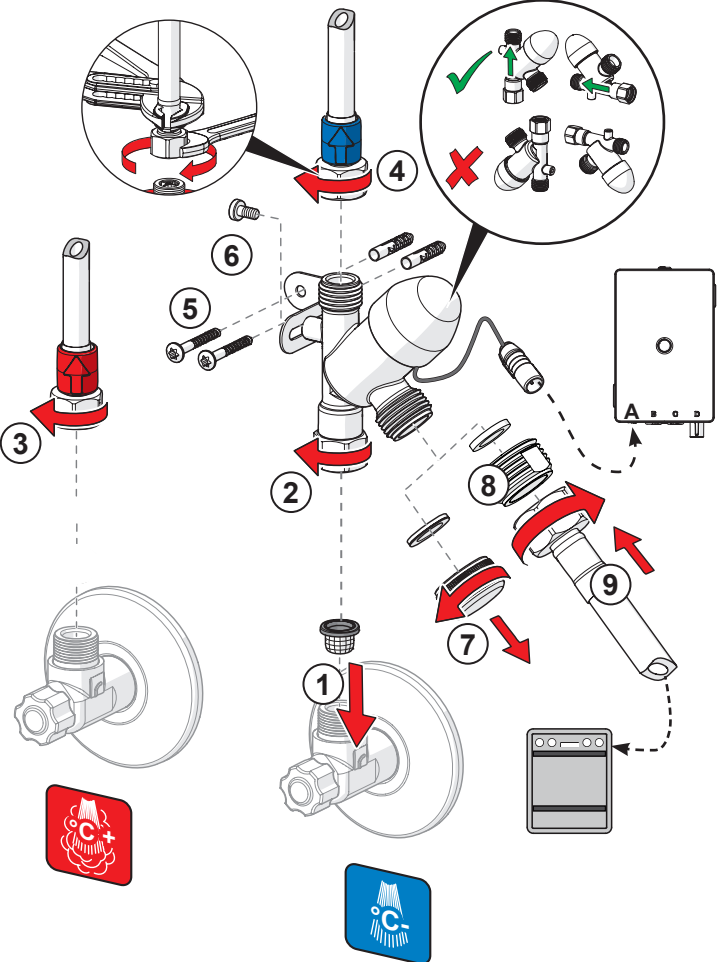





19

① ② ③ ④

2

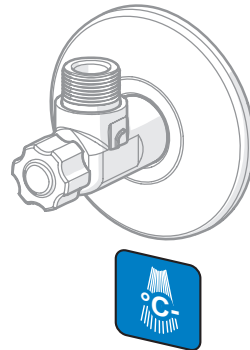
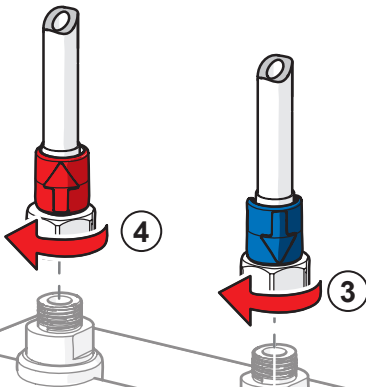





①

⑤

③

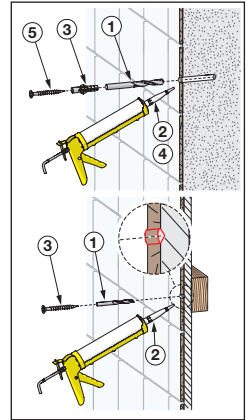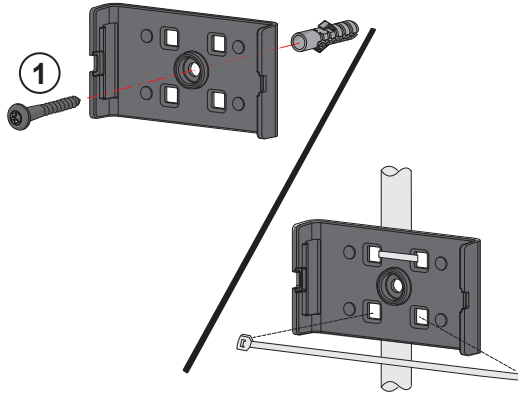


AA 1.5 V Lithium x 2

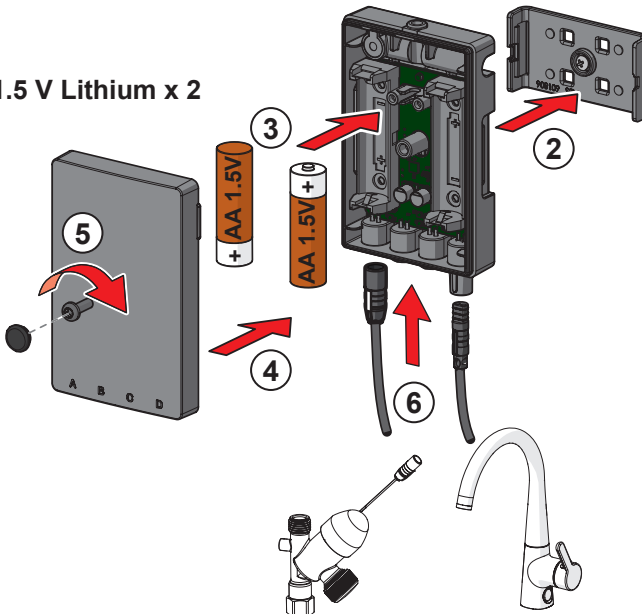





1

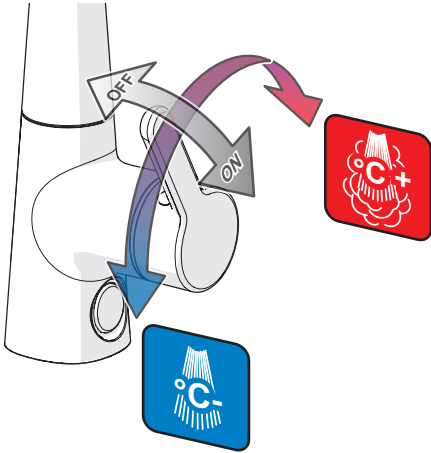


2

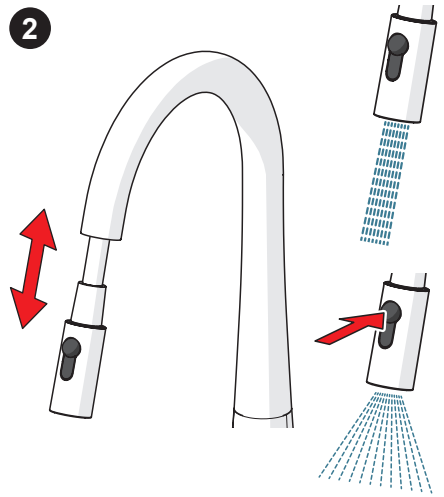


3




ON 4h



OFF

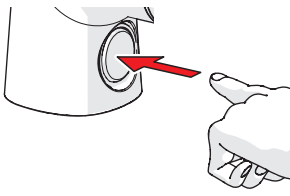




ON 12h



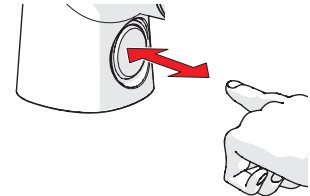





OFF





AA 1.5 V Lithium x 2

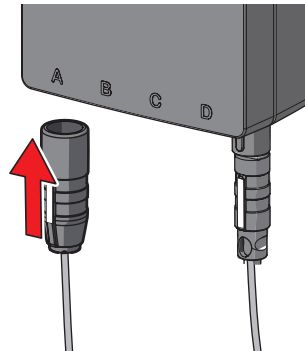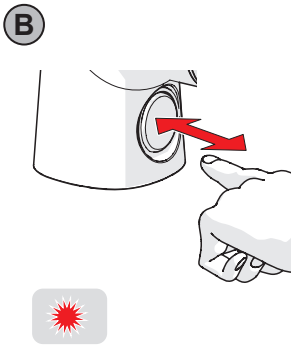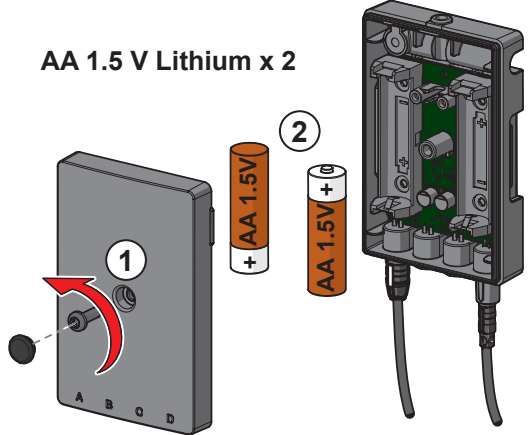


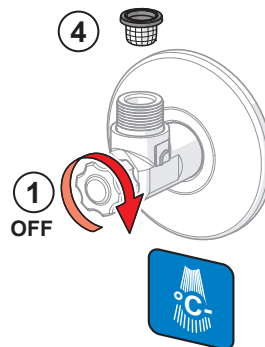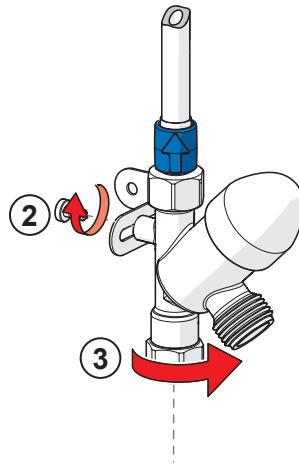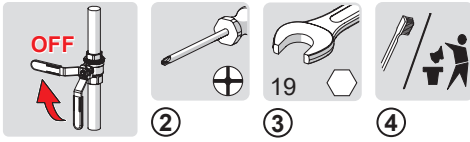

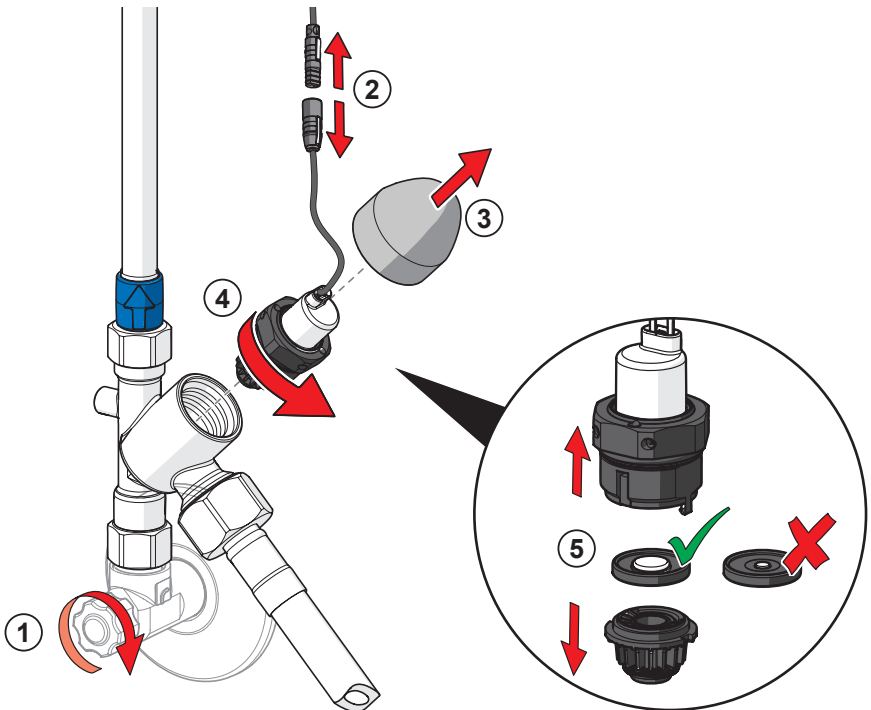

















②







⑤

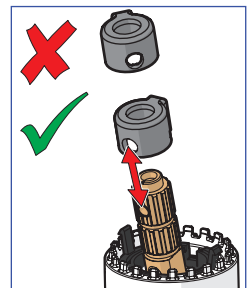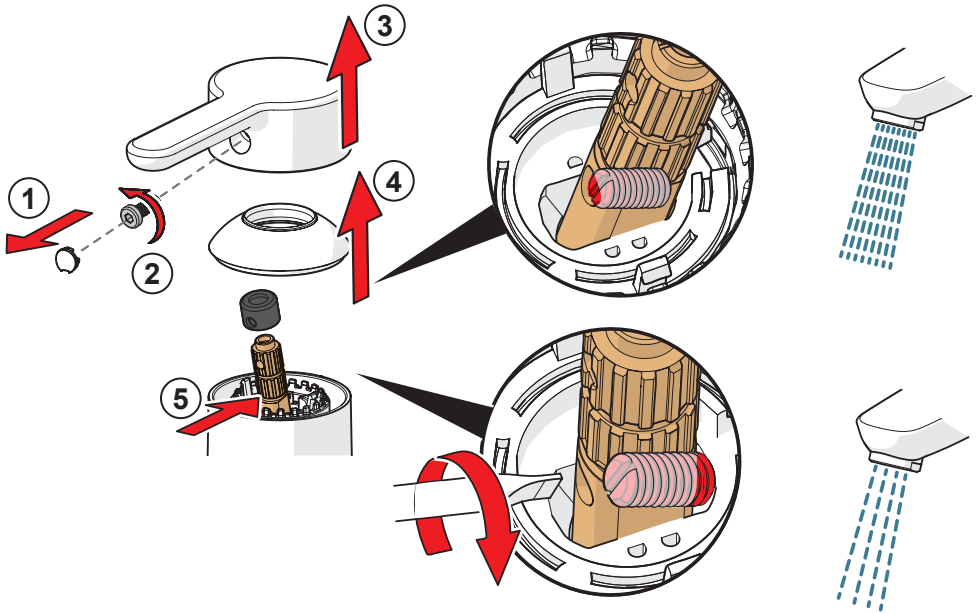


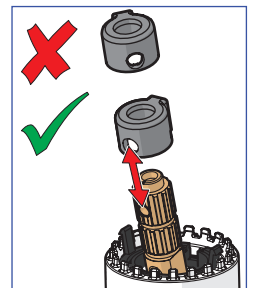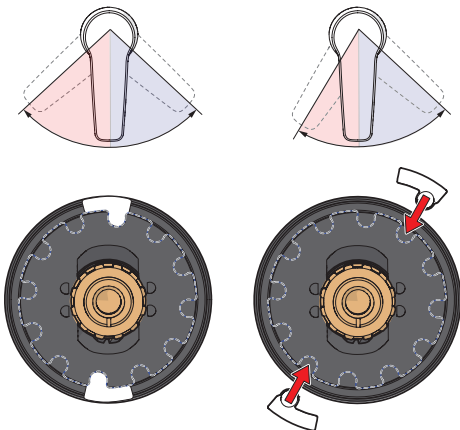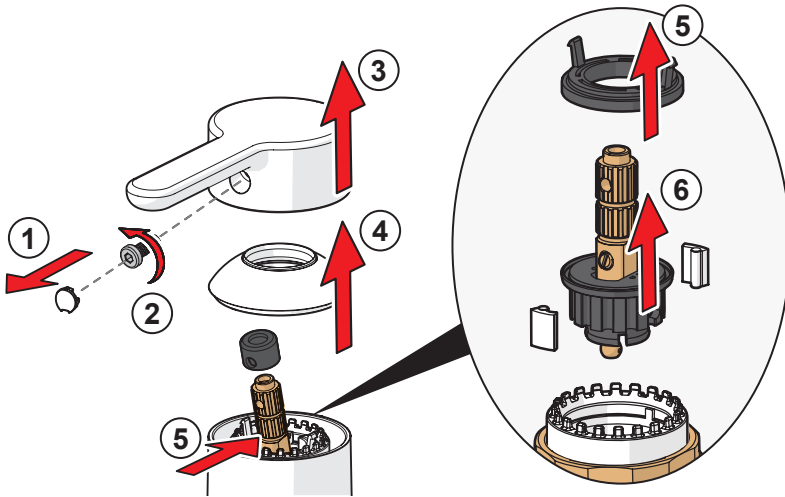



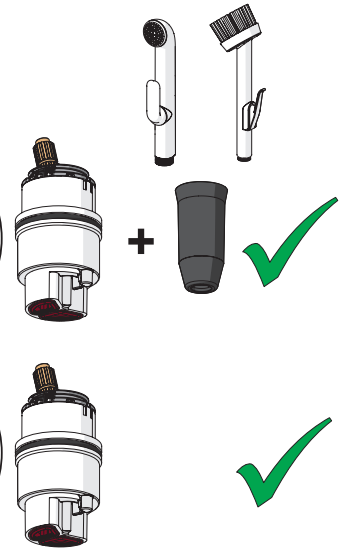


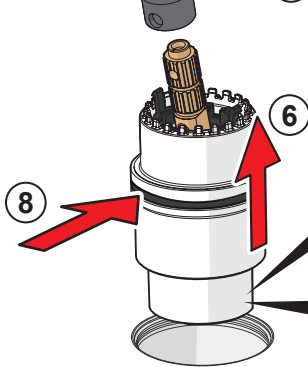

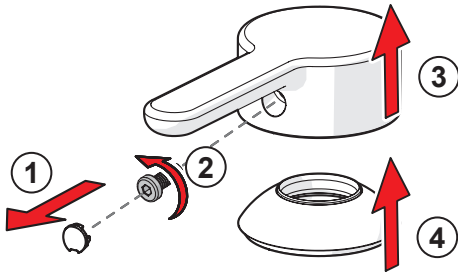
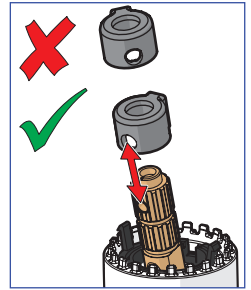
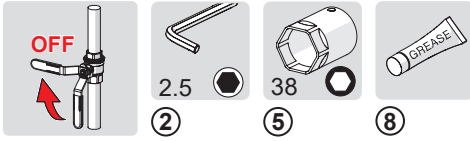



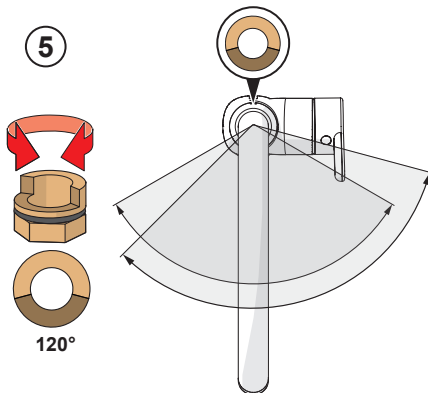
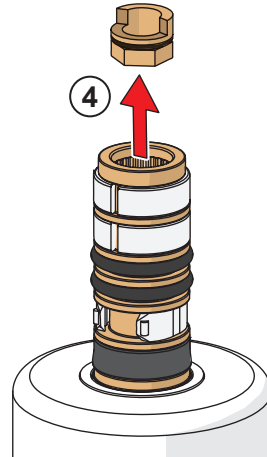
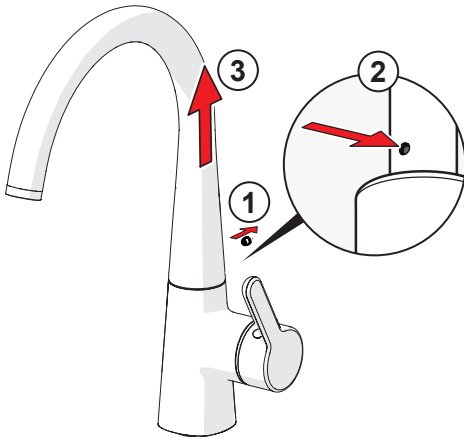







59 914 429




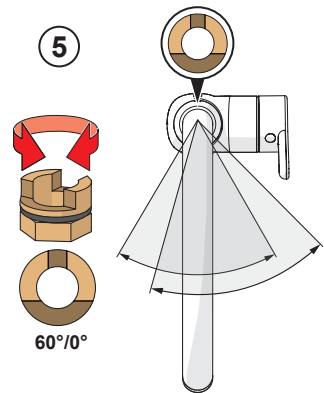


59 914 264

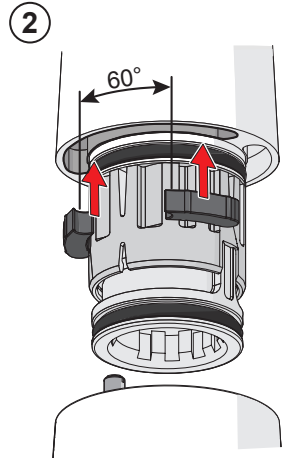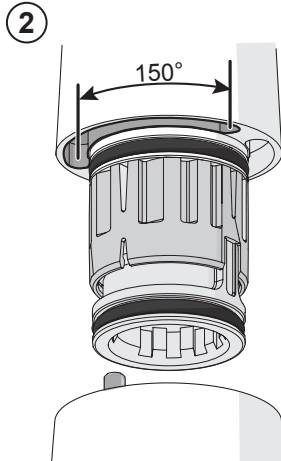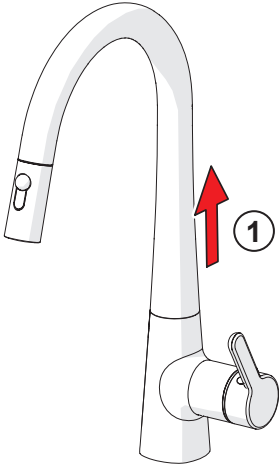

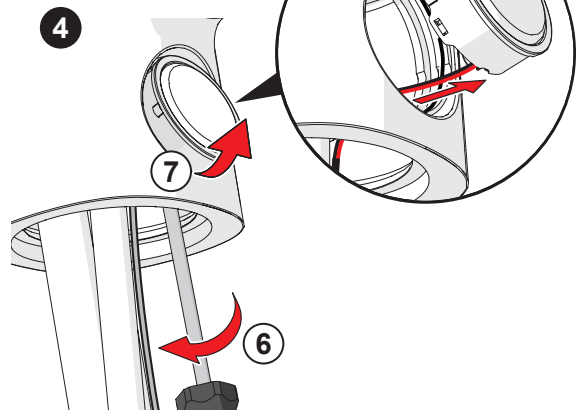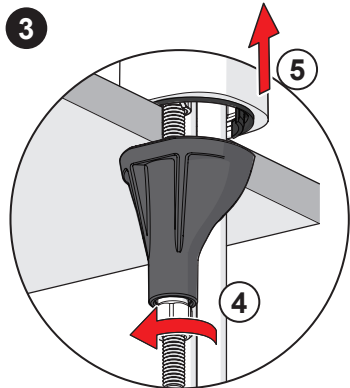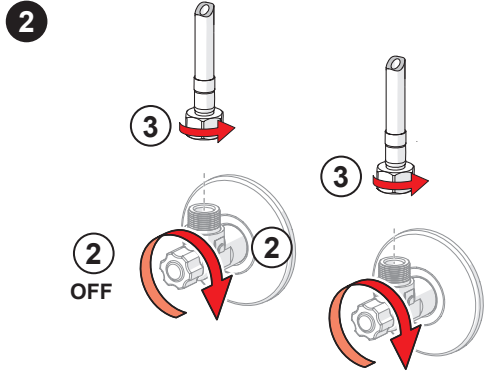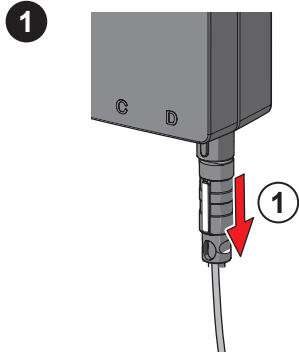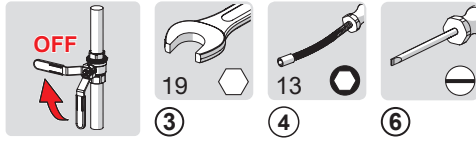

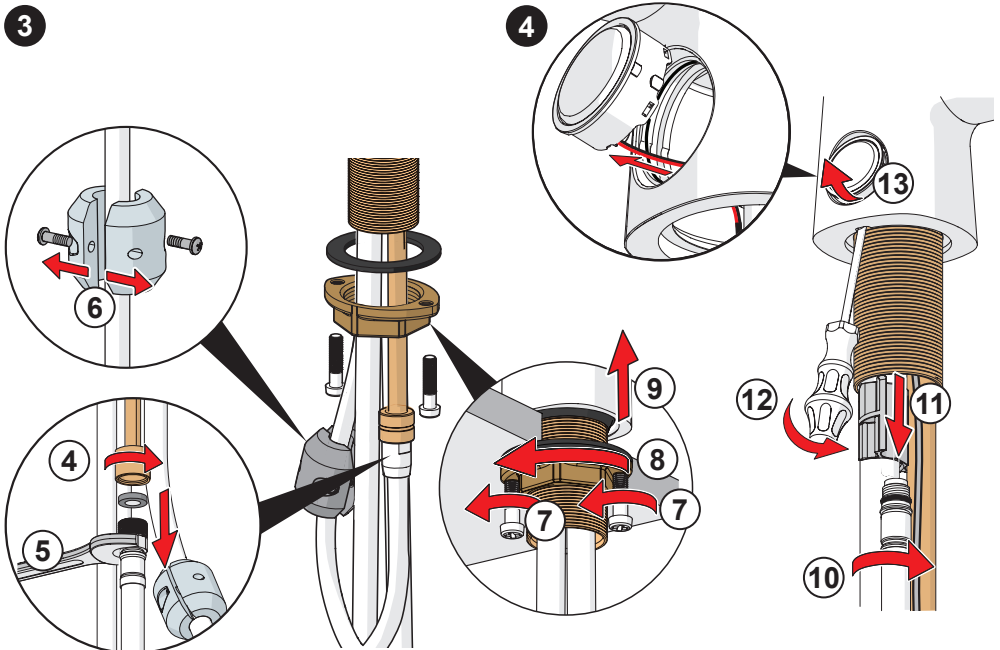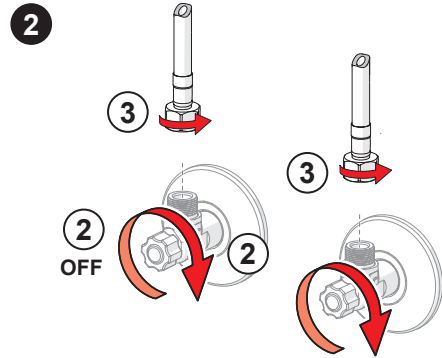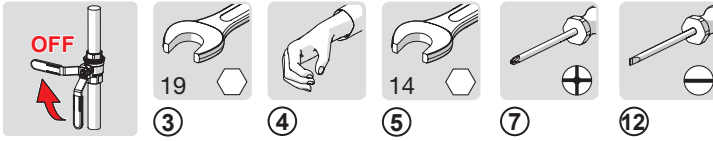

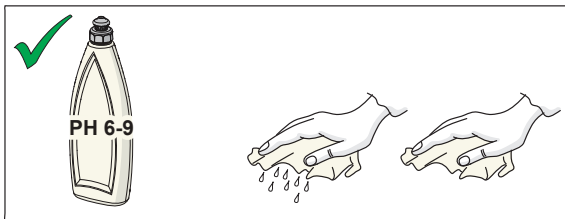

cleaning.hansa.com

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands: Oras and Hansa.

The Group's head office is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1,200 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

HANSA Armaturen GmbH
P. O. BOX 81 02 40
D-70519 Stuttgart
Sigmaringer Strasse 107
D-70567 Stuttgart
Tel.: +49 711 16 14 0
Fax: +49 711 16 14 368
info@hansa.de
www.hansa.com



943282D-03-21