


# LAUFEN INSTALLATION SYSTEM

## CWL103

### Concealed frame with cistern for wallhung WC

#### 92710.3

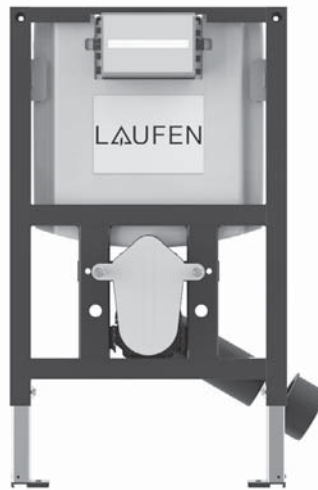

#### TECHNICAL DATA

Order no.	92710.3	Installation depth	155-205 mm
Certified to	EN 14055 CL1	Weight	10,7 kg
matching for	All LAUFEN wallhung toilets	Mounting acc. incl.	Wall bracket, protection box for access opening, inspection box for WC connection, retaining bolts with protection plugs, angle valve R 1/2, WC connector 90° (Ø 90 mm), PE transition sleeve Ø 90 / 110 mm, WC connection set Ø 90 mm, L=180 mm, mounting material.
Specifications	Self-supporting steel frame for covering with plasterboard, installation onto a solid wall, in drywall constructions. For front/top operated. Dual-Flush 6/3-l (4.5/3-l-flush), with water condensation insulation. Fill valve Noise Class I.	Mounting acc. excl.	Fastening set for wall, order no. 89563.5 Sound insulation set, order no. 89269.6
Other specifications	Galvanized leg supports, rotatable, height-adjustable 0-200 mm. Capable to resist 400 kg	Accessories excl.	Actuator plates dual flush, order no. 90010.0, 90010.1, 90010.2 (glass), 90010.3 (stainless steel), 90010.4, 90010.5, 90010.6, Electronic actuator plate dual flush, order no. 90010.7 (glass)
Water inlet	side left R 1/2, brass, matching for standard pipe systems	Mounting information	Height from finished floor to top of WC pre-set to 400 mm.
Outlet	DN 90/110	Colours	Surface powder coated blue
Flow pressure range	0.5-10 bar		
Water temperature	max. 25°C		
Tank	Installation depth: 120 mm, material PP		

#### TECHNICAL DRAWINGS / S 1 : 20

